

FLICKER + SPECTRAL
PARAMETERS



| FLICKER PARAMETERS | |
|--|---|
| Measuring signal frequency range | 0.1 Hz to 12.5 kHz |
| Sampling rate | 125 kHz (10x max. measured frequency) |
| Flicker illuminance | 0.1 lx – 15,000 lx |
| Calculated parameters | flicker index, flicker percentage, dominant frequencies |
| Visualization of signal as time series and in frequency domain (Fast Fourier Transformation – FFT) | |
| Additional metrics, as standards evolve, are incorporated as firmware updates | |

| SPECTRAL PARAMETERS | |
|---|--------------------|
| Spectral range | 340 – 780 nm |
| Illuminance | 1 – 200,000 lx |
| Irradiance | 20 – 200,000 mW/m² |
| Luminous flux (with GL OPTI SPHERE 48) | 0.03 – 150 lm |
| Radiant power (with GL OPTI SPHERE 48) | 0.03 – 500 mW |
| Luminance (with GL OPTI PROBE 1.0.10 LUMINANCE) | 3 – 80,000 cd/m² |
| Physical resolution | ~ 1.7 nm |
| Wavelength reproducibility | 0.5 nm |

| TECHNICAL DATA SHEET | |
|--|---|
| Flicker sensor | high-speed photodiode, V(λ) correction class B |
| Spectral sensor | CMOS image sensor |
| Number of pixels | 256 |
| Integration time | 10 ms – 10 s |
| A/D conversion | 16 bits |
| Signal to noise ratio | 1000:1 |
| Cosine correction | Class B according to DIN 5032 Part 7 |
| Stray light | 2*10E-3 |
| Spectroradiometric accuracy | 4% |
| Measurement uncertainty of color coordinates (x,y) | 0.0015 |
| Display full color | 240x320 px |
| PC interface | USB 2.0 standard |
| Micro SD card | 4GB |
| Power | lithium-ion battery 1400 mAh |
| Power consumption | ~ 640 mA |
| Power supply | Input: AC 100-240V 50/60 Hz 0.15 A Output: 5 V-1 A |
| Ambient temperature | 5 – 35°C |
| Dimensions | 74 mm x 146 mm x 24 mm |
| Weight | 315 g (< 1 pound) |

CONTACT US:

| GERMANY | FRANCE | USA | POLAND |
|--|---|--|---|
| JUST Normlicht GmbH Vertrieb + Produktion Tobelwasenweg 24 D-73235 Weilheim/Teck Phone: +49 7023 9504 0 Fax: +49 7023 9504 52 info@just-normlicht.de | JUST Normlicht France Sàrl 3, Rue Louis Pasteur 67240 Bischwiller Phone: +33 (0)3 8806 2822 Fax: +33 (0)3 8806 2823 info@just-normlicht.fr | JUST Normlicht Inc. 2000 Cabot Blvd. West, Suite 120 Langhorne, PA 19047-2408 United States Phone: +1 267 852-2200 Fax: +1 267 852-2207 infoamericas@gloptic.com | GL OPTIC Polska Sp. z o.o. Sp.k. ul. Poznańska 70 62-040 Puszczykowo Tel: +48 61 819 40 03 office@gloptic.com |

NEW
Touch
the Flicker

GL SPECTIS 1.0 T Flicker

Integrates the measurement of flicker parameters, colorimetric and photometric data – all in a high performance hand-held package



WHAT IS FLICKER?


- Flicker is the perception of temporal changes in the light output (luminance flicker) or color (chromatic flicker) of the light.
- Part of a broader problem termed Temporal Light Artifacts (TLA) that include:
 - Stroboscopic Effect that appears when an object with continuous motion is illuminated with a flickering light source
 - Phantom array occurs when we make a saccade (fast eye movements) and the image of the fluctuating light source is transited across the retina

WHY MEASURE FLICKER?

- Flicker frequencies from a few Hz to 70-100 Hz can be perceived by humans.
- Long exposure to light flicker causes headaches, migraines, increases eye strain and attention distraction.
- Flicker impacts workplace comfort and effectiveness while reducing visual task performance and productivity.

WHAT IS MEASURED?

- IESNA has defined two primary quantities used to characterize flicker:
 - flicker index
 - flicker percentage
- Fundamental flicker frequency is also commonly captured.

 **MADE IN EUROPE**

GL Optic products are made in Europe, sold and serviced on all continents.


TOUCH the FLICKER

GL Spectis 1.0 T Flicker, the latest innovation from GL Optic, integrates the accurate measurement of light flicker with all the measurement quantities of the GL Spectis 1.0 Touch. Flicker quantification is accomplished with a combination of photodiodes, high speed analog circuits, and high sample rate analog to digital (A/D) converters.

SPECTROMETER and PHOTODIODE MEASUREMENT


GL Optic spectrometers are predominantly designed and preconfigured for light measurement. The B class cosine corrected measurement head is a standard accessory allowing for the proper measurement of light. With the addition of a separate, dedicated photodiode and real-time data processing, they measure flicker as well.

SIMPLE PERIODIC WAVEFORM PROPERTIES and FLICKER METRICS



Triangle Waveform Shape

- Percent flicker = 100%
- Flicker index = 0.250
- Frequency 100 Hz

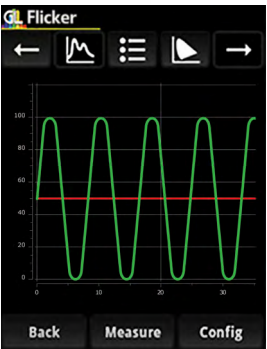

Sine Waveform Shape

- Percent flicker = 100%
- Flicker index = 0.318
- Frequency 100 Hz



Square Waveform Shape


- Percent flicker = 100%
- Flicker index = 0.500
- Frequency 100 Hz

KEY FREATURES:


- Compact, portable, solidly built
- Intuitive, color LCD touch screen user interface
- Laboratory grade accuracy and repeatability
- Dark current and temperature compensation
- Automatic accessory detection and calibration loading
- Use standalone, or in conjunction with system accessories

INCLUDES:

- Certificate of calibration to reference standard
- Cosine-corrected standard diffuser head (illuminance)
- Versatile interfaces: USB, SD card
- Remote trigger socket
- Universal mount for tripod or optical bench use
- Rugged case, charger, cable
- 1 year warranty with extension options
- Use standalone, or in conjunction with system accessories

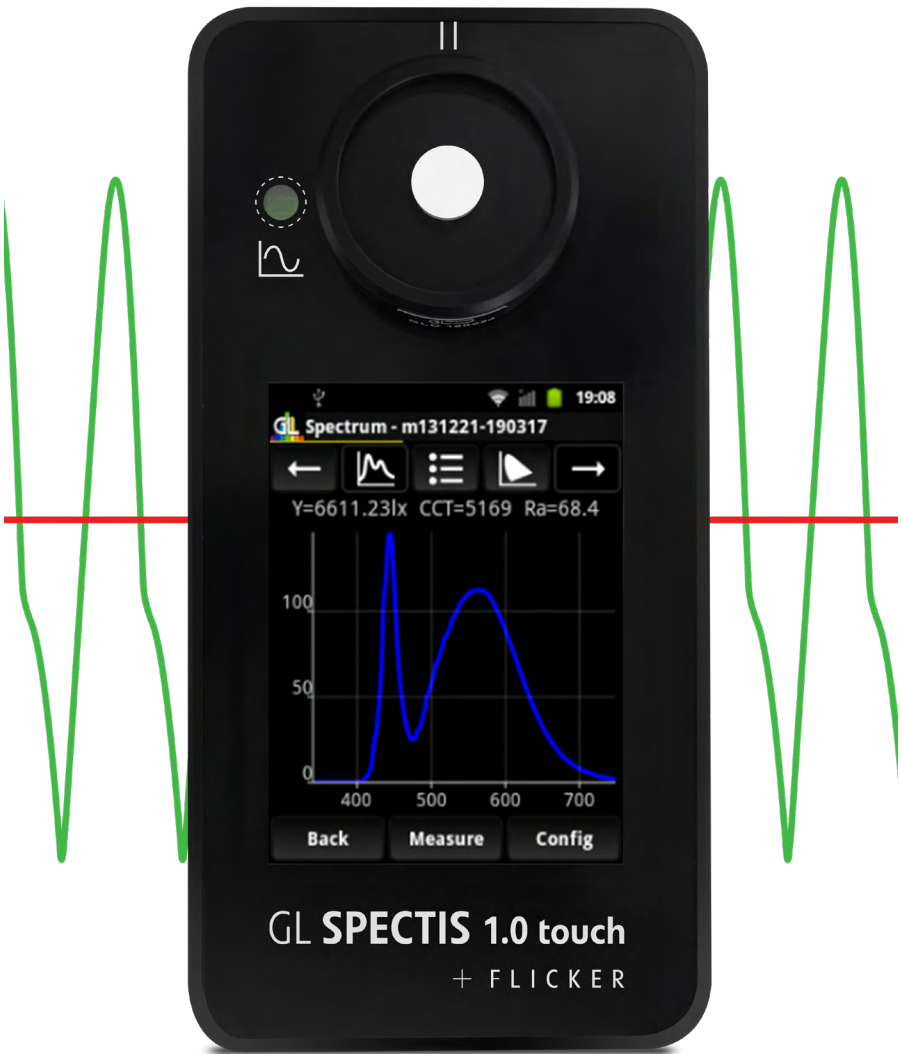


INTEGRATED FLICKER and ILLUMINANCE SPECTRORADIOMETRIC MEASUREMENT INSTRUMENT

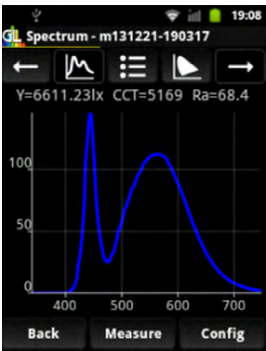


SPECTRUM

This calibrated spectroradiometer provides Spectral Power Distribution curves that are the basis for all photometric and colorimetric calculations.

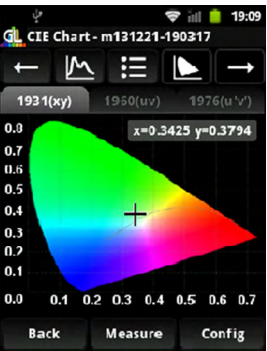

COLOR

Various CIE Chromaticity Charts and calculated color coordinates help the user to check the light color output.

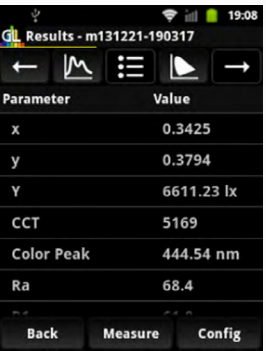

VALUE

Displays high accuracy illuminance measurements and includes all key photometric and colorimetric values directly on the screen such as: lx, fcd, x,y, color coordinates, CCT, CRI and radiometric scaling.

GL SPECTROSOFT with TM 30 (available in GL Spectrosoft PRO and LAB)

The optional analytical software, GL Spectrosoft, adds the latest capabilities to evaluation and reports key light metrics, including The Illuminating Engineering Society TM-30-15 method for evaluating light source color rendition quality. This is an objective and statistical approach, quantifying the fidelity (closeness to a reference) and gamut (increase or decrease in chroma) of a light source.

The software also generates color vector graphics that indicate average hue and chroma shifts, to assist in interpreting Rf and Rg characteristics.

